

# Sertifikaat

REPUBLIEK VAN SUID AFRIKA

PATENT KANTOOR  
DEPARTEMENT VAN HANDEL  
EN NYWERHEID



REC'D 20 SEP 2004

WIPO

PCT

# Certificate

REPUBLIC OF SOUTH AFRICA

PATENT OFFICE  
DEPARTMENT OF TRADE AND  
INDUSTRY

Hiermee word gesertifiseer dat  
This is to certify that

*IB04/51060*

- 1) South African Provisional Patent Application No. 2003/5148 accompanied by a Provisional Specification was originally filed at the South African Patent Office on 2 July 2003, in the name of DENEL (PTY) LTD in respect of an invention entitled: "Fume Extractor".
- 2) The photocopy attached hereto is a true copy of the provisional specification and drawings filed with South African Patent Application No. 2003/5148.

Geteken te

**PRETORIA**

Signed at

in die Republiek van Suid-Afrika, hierdie

in the Republic of South Africa, this

dag van

26<sup>th</sup>

July 2004

day of

*J. L. Goepbe*

Registrar of Patents

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

BEST AVAILABLE COPY

REPUBLIC OF SOUTH AFRICA

PATENTS ACT, 1978

## REGISTER OF PATENTS

OFFICIAL APPLICATION NO.

LODGING DATE : PROVISIONAL

ACCEPTANCE DATE

21 01 2003/5148

22 2 July 2003

43

INTERNATIONAL CLASSIFICATION

LODGING DATE : COMPLETE

GRANTED DATE

51

23

FULL NAME(S) OF APPLICANT(S) / PATENTEE(S)

71 DENEL (PTY) LTD

APPLICANTS SUBSTITUTED :

DATE REGISTERED

71

ASSIGNEE(S)

DATE REGISTERED

71

FULL NAME(S) OF INVENTOR(S)

72 PAUL, Lothar Alwin

PRIORITY CLAIMED

COUNTRY

NUMBER

DATE

N.B. Use International  
abbreviation for country.  
(See Schedule 4)

33

31

32

TITLE OF INVENTION

54 FUME EXTRACTOR

ADDRESS OF APPLICANT(S) / PATENTEE(S)

368 Selbourne Avenue  
Centurion  
PRETORIA  
0182  
South Africa

ADDRESS FOR SERVICE

REF

74 D M Kisch Inc, 54 Wierda Road West, Wierda Valley, SANDTON

P26984ZA00

PATENT OF ADDITION NO.

DATE OF ANY CHANGE

61

FRESH APPLICATION BASED ON


DATE OF ANY CHANGE

REPUBLIC OF SOUTH AFRICA  
PATENTS ACT, 1978


APPLICATION FOR A PATENT AND ACKNOWLEDGEMENT OF RECEIPT

(Section 30 (1) - Regulation 22)

The grant of a patent is hereby requested by the undermentioned applicant on the basis of the present application filed in duplicate.



PfHR  
229



OFFICIAL APPLICATION NO	
21	01 <b>4003/5148</b>

DMK REFERENCE
P26984ZA00

FULL NAME(S) OF APPLICANT(S)	
71	DENEL (PTY) LTD

ADDRESS(ES) OF APPLICANT(S)	
	368 Selbourne Avenue Centurion PRETORIA 0182 South Africa

TITLE OF INVENTION			
54	FUME EXTRACTOR		
	THE APPLICANT CLAIMS PRIORITY AS SET OUT ON THE ACCOMPANING FORM P2 The earliest priority claimed is		
	THIS APPLICATION IS FOR A PATENT OF ADDITION TO PATENT APPLICATION NO.	21	01
	THIS APPLICATION IS FRESH APPLICATION IN TERMS OF SECTION 37 AND BASED ON APPLICATION NO.	21	01

THIS APPLICATION IS ACCOMPANIED BY :	
<input checked="" type="checkbox"/>	1a A single copy of a provisional specification of 12 pages.
<input type="checkbox"/>	1b Two copies of a complete specification of pages.
<input type="checkbox"/>	2a Informal drawings of sheets.
<input checked="" type="checkbox"/>	2b Formal drawings of 6 sheets.
<input type="checkbox"/>	3 Publication particulars and abstract (form P8 in duplicate).
<input type="checkbox"/>	4 A copy of figure of the drawings for the abstract.
<input checked="" type="checkbox"/>	5 Assignment of invention (from the inventors) or other evidence of title.
<input type="checkbox"/>	6 Certified priority document(s).
<input type="checkbox"/>	7 Translation of priority document(s).
<input type="checkbox"/>	8 Assignment of priority rights.
<input type="checkbox"/>	9 A copy of form P2 and a specification of S.A. Patent Application.
<input checked="" type="checkbox"/>	10 A declaration and power of attorney on form P3.
<input type="checkbox"/>	11 Request for ante-dating on form P4.
<input type="checkbox"/>	12 Request for classification on form P9.
<input type="checkbox"/>	13a Request for delay of acceptance on form P4.
<input type="checkbox"/>	13b

DATED 2 July 2003

ADDRESS FOR SERVICE	
74	D M Kisch Inc Inanda Greens Business Park 54 Wierda Road West Wierda Valley SANDTON

*K Bredenkamp*  
Patent Attorney for Applicant(s)

RECEIVED
OFFICIAL DATE STAMP 2003-07-02
REGISTRAR OF PATENTS

The duplicate will be returned to the applicant's address for service as proof of lodging but is not valid unless endorsed with official stamp.

## REPUBLIC OF SOUTH AFRICA

## PATENTS ACT, 1978

PROVISIONAL SPECIFICATION  
( Section 30 (1) - Regulation 27 )

OFFICIAL APPLICATION NO.		LODGING DATE		DMK REFERENCE
21	01 2003/5148	22	2 July 2003	P26984ZA00

FULL NAME(S) OF APPLICANT(S)	
71	DENEL (PTY) LTD

FULL NAME(S) OF INVENTOR(S)	
72	PAUL, Lothar Alwin

TITLE OF INVENTION	
54	FUME EXTRACTOR

## FUME EXTRACTOR

### INTRODUCTION AND BACKGROUND TO THE INVENTION

This invention relates to a fume extractor for a barrel of a gun, and to a barrel

5 and a gun provided with such a fume extractor.

A known fume extractor (such as the one disclosed in US patent number 5,404,789) for extracting fumes from the bore of a barrel of a gun, after a shot has been fired, comprises a main reservoir and an auxiliary reservoir, both  
10 surrounding the barrel, with the auxiliary reservoir located between said main reservoir and the breech end of the tube. A first set of ports, which are slanted towards the muzzle end of the bore, provides communication between the main reservoir and the bore while a second set of ports, which are perpendicular to the bore, provides communication between the bore and the auxiliary reservoir.

15 A set of check valves provides communication between the auxiliary reservoir and the main reservoir, when the pressure in the main reservoir is less than that of the auxiliary reservoir.

In use, when a shot is fired, owing to the pressure difference between the bore  
20 and the reservoir, the main and auxiliary reservoirs are charged or pressurised by fumes passing through the two sets of ports from the bore into the main and auxiliary reservoirs. The main reservoir is thus pressurised via the said first set of ports, as well as from the auxiliary reservoir via the set of check valves.

When the projectile leaves the barrel, there is a pressure drop in the bore, so the set of check valves closes and the pressure in the main reservoir is released by blowing the fumes back into the bore via the first set of ports in the direction of the muzzle brake, thus to extract the fumes from the bore.

5

A first disadvantage is that, owing to the fact that the known fume extractor has only two reservoirs; the resultant extraction is a rapid discharge rather than an extended discharge. In the case of a rapid discharge, the fumes are insufficiently extracted, leading to fumes entering the turret of the gun to the  
10 detriment of the operators thereof.

Another disadvantage of the known fume extractor is that it is of insufficient capacity to sufficiently cool down the fumes before reaching the check valves when the reservoirs are charged. The result is that the check valves are  
15 damaged by the high temperature and the acceleration or deceleration of the fumes. The check valves therefore eventually disintegrate and deform.

Yet another disadvantage of the known fume extractors is that the attachment thereof to the barrel, makes it very difficult to remove the fume extractor from  
20 the barrel for maintenance purposes, for example when the check valves have to be replaced.

**OBJECT OF THE INVENTION**

It is therefore an object of the present invention to provide a fume extractor for a barrel of a gun, and a barrel and a gun provided with such a fume extractor with which the aforesaid disadvantages can be overcome or at least minimised.

5

**SUMMARY OF THE INVENTION**

According to the invention there is provided a fume extractor for extracting fumes from a bore of a barrel of a gun comprising:

- a main reservoir surrounding the said barrel;
- 10     - an inlet reservoir also surrounding the barrel and communicating with the bore of the barrel via a first set of ports and with the main reservoir via a second set of ports; and
- an auxiliary reservoir also surrounding the barrel of the gun and communicating with the main reservoir via a third set of ports and
- 15     with the bore of the barrel via a fourth set of ports,

the arrangement being such that the main reservoir is pressurised via both the inlet and auxiliary reservoirs when the gun is fired and further such that the fumes in the barrel are extracted by the release of pressure in the main and auxiliary reservoirs via the fourth set of ports.

20

Further according to the invention, each port of the second set is provided with a check valve, the arrangement being such that the check valves allow passing of the fumes from the inlet reservoir to the main reservoir via the second set of

ports, but restricts reverse flow of the fumes from the main reservoir to the inlet reservoir.

5 The inlet reservoir may be sandwiched between the main reservoir and the barrel of the gun.

The auxiliary reservoir may also be sandwiched between the main reservoir and the barrel of the gun and may be located adjacent the inlet reservoir on a muzzle brake end thereof.

10

The first set of ports may be a plurality of ports distributed around the barrel and may extend perpendicular to the barrel.

15 The fourth set of ports may also be a plurality of ports distributed around the barrel and may slant in the direction of a muzzle brake of the gun.

The inlet and auxiliary reservoirs may be partly defined by a first tubular sleeve having end walls; and a separating wall, which separates the inlet and auxiliary reservoirs.

20

The first tubular sleeve may concentrically surround the barrel, with the end and separating walls sealingly abutting the outside of the barrel.



An O-ring may be provided between the first tubular sleeve and the barrel to create an airtight seal between them.

5 The main reservoir may be partly defined by a second tubular sleeve concentrically surrounding the first tubular sleeve, as well as by two annular end caps for sealingly engaging the second tubular sleeve and the first tubular sleeve.

10 An O-ring may be located between the second tubular sleeve and each end cap to create an airtight seal between the second tubular sleeve and each end cap.

A retaining ring for retaining the fume extractor in position on the barrel may be releasably connectable to the barrel.

15

The retaining ring may be connected to the barrel intermediate its ends, towards the muzzle brake end thereof and to one end of the fume extractor.

20 The retaining ring may be provided with an internal screw thread for screwing onto a complimentary thread provided on the outside of the barrel.

The retaining ring may be provided with a set of holes, for receiving urging screws, for urging the fume extractor in a direction towards the retaining ring for removal of the fume extractor from the barrel.

- 5 According to a second aspect of the invention there is provided a barrel of a gun having a fume extractor according to the first aspect of the invention.

According to a third aspect of the invention there is provided a gun having a barrel according to the second aspect of the invention.

10

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

The invention will now be described further by way of a non-limiting example with reference to the accompanying drawings wherein:

- figure 1 is a longitudinal-sectional side view of a fume extractor according to the invention, surrounding a barrel of a gun, for extracting fumes from the said barrel;
- figure 2 is a perspective view of the fume extractor of figure 1;
- figure 3 is a disassembled view of the fume extractor of figures 1 and 2;
- figure 4 is an exploded perspective view of the fume extractor;
- 20 figure 5 is the same as that of figure 4 with a central portion of the fume extractor assembled; and
- figure 6 is a side view of figure 4.

## DESCRIPTION OF A PREFERRED EMBODIMENT OF THE INVENTION

Referring to the drawings, a fume extractor according to a preferred embodiment of the invention, for extracting fumes from a bore 12 of a barrel 14 of a gun (not shown) is generally designated by reference numeral 10.

5

Referring to figures 1 and 2, the fume extractor 10 comprises an annular main reservoir 16; an annular inlet reservoir 18; and an annular auxiliary reservoir 20, all concentrically surrounding the barrel 14. The inlet reservoir 18 communicates with the bore 12 via a first set of ports 22 and with the main reservoir via a second set of ports 24. The auxiliary reservoir 20 communicates with the main reservoir 16 via a third set of ports 26 and with the bore 12 of the barrel 14 via a fourth set of ports 28. The arrangement is such that the main reservoir 16 is pressurised via both the inlet and auxiliary reservoirs 18 and 20 respectively, when the gun is fired. The arrangement is further such that the fumes in the barrel 14 are extracted by the release of pressure in the main and auxiliary reservoirs 16 and 20 respectively, via the fourth set of ports 28, after the projectile (not shown) has left the barrel 14.

Each port of the second set of ports 24 is provided with a check valve 30, for allowing passing of the fumes from the inlet reservoir 18 to the main reservoir 16 via the second set of ports 24, while restricting reverse flow of the fumes from the main reservoir 16 to the inlet reservoir 18.

The inlet reservoir 18 is sandwiched between the main reservoir 16 and the barrel 14 of the gun. The auxiliary reservoir 20 is also sandwiched between the main reservoir 16 and the barrel 14 of the gun and is located adjacent the inlet reservoir 18 on a muzzle brake end thereof.

5

The first set of ports 22 is a plurality of ports distributed around the barrel 14 and extends perpendicular to the barrel 14. The fourth set of ports 28 is a plurality of ports distributed around the barrel 14 and slant in the direction of the muzzle brake of the gun.

10

Referring particularly to figure 3 and 4, the inlet and auxiliary reservoirs 18 and 20 respectively, are partly defined by a first tubular sleeve 32 having two end walls 32.1 and a separating wall 32.2, which separates the inlet and auxiliary reservoirs 18 and 20 respectively. The first tubular sleeve 32 concentrically surrounds the barrel 14, with the end and separating walls 32.1 and 32.2 sealingly abutting the outside of the barrel 14.

15

The main reservoir 16 is partly defined by a second tubular sleeve 34 concentrically surrounding the first tubular sleeve 32, as well as by two annular end caps 36 for sealingly engaging the second tubular 34 sleeve and the first tubular sleeve 32.

20

An O-ring 38 is located between the second tubular sleeve 34 and each end cap 36 to create an airtight seal between the second tubular sleeve 34 and each end cap 36. O-rings 38 are also located between the first tubular sleeve 32 and the barrel 14 and between the first tubular sleeve 32 and each end cap 36.

Referring particularly to figure 5, a retaining ring 40 for retaining the fume extractor 10 in position on the barrel 14 is a split band 40.1, which is connected to the barrel 14 towards the muzzle brake side thereof and abuts the fume extractor 10. The retaining ring 40 defines an internal screw thread 40.2 for screwing onto a complimentary thread 42 provided on the outside of the barrel 14. The retaining ring 40 is provided with a set of holes 44, for receiving urging screws (not shown), for urging the fume extractor 10 in a direction towards the retaining ring 40 for removal of the fume extractor 10 from the barrel 14.

15

In use, when a shot is fired, combustion of the explosive charge pressurises the bore 12 of the barrel 14 with fumes at high pressure and temperature. Subsequently and owing to the pressure difference between the bore 12 and the inlet and auxiliary reservoirs 18 and 20, the fumes pass into the inlet and auxiliary reservoirs 18 and 20 from the bore 12 via the first and fourth sets of ports 22 and 28 respectively. Thereafter, owing to the pressure difference between the inlet and auxiliary reservoirs 18 and 20 and the main reservoir 16,

fumes pass into the main reservoir 16 from the inlet and auxiliary reservoirs 18 and 20 via the second and third sets of ports 24 and 26.

After the projectile leaves the barrel 14, there is a pressure drop in the bore 12, resulting in a pressure difference between the main and auxiliary reservoirs 16 and 20 and the bore 12, which promotes the release of pressure from the main and auxiliary reservoirs 16 and 20 into the bore 12, thus to blow the fumes out of the muzzle end of the barrel 14 and therefore purging the bore 12 of the remaining fumes. The check valves 30 in the second set of ports 24 close, thus restricting reverse flow along the second set of ports 24.

It has been found that the fume extractor 10, according to the present invention, allows the fumes entering the inlet reservoir 18 to cool down sufficiently before reaching the check valves 30, so that they are not damaged. It was further found that owing to the provision of an auxiliary reservoir 20, the fumes are discharged from the main and auxiliary reservoirs over an extended period rather than rapidly, therefore allowing the fumes to be effectively extracted from the bore 12 and limiting the fumes entering the turret.

It has yet further been found that the fume extractor 10 can relatively easily be removed from the barrel 14 of the gun for maintenance purposes, owing to the retaining ring 40 aiding in such removal, when using the urging screws.

It will be appreciated that variations in detail are possible with a fume extractor for a barrel of a gun, and a barrel and a gun provided with such a fume extractor according to the invention without departing from the scope of this disclosure.

5

DATED THIS 2<sup>nd</sup> DAY OF JULY 2003.



D M KISCH INC

10

PATENT ATTORNEYS FOR THE APPLICANT

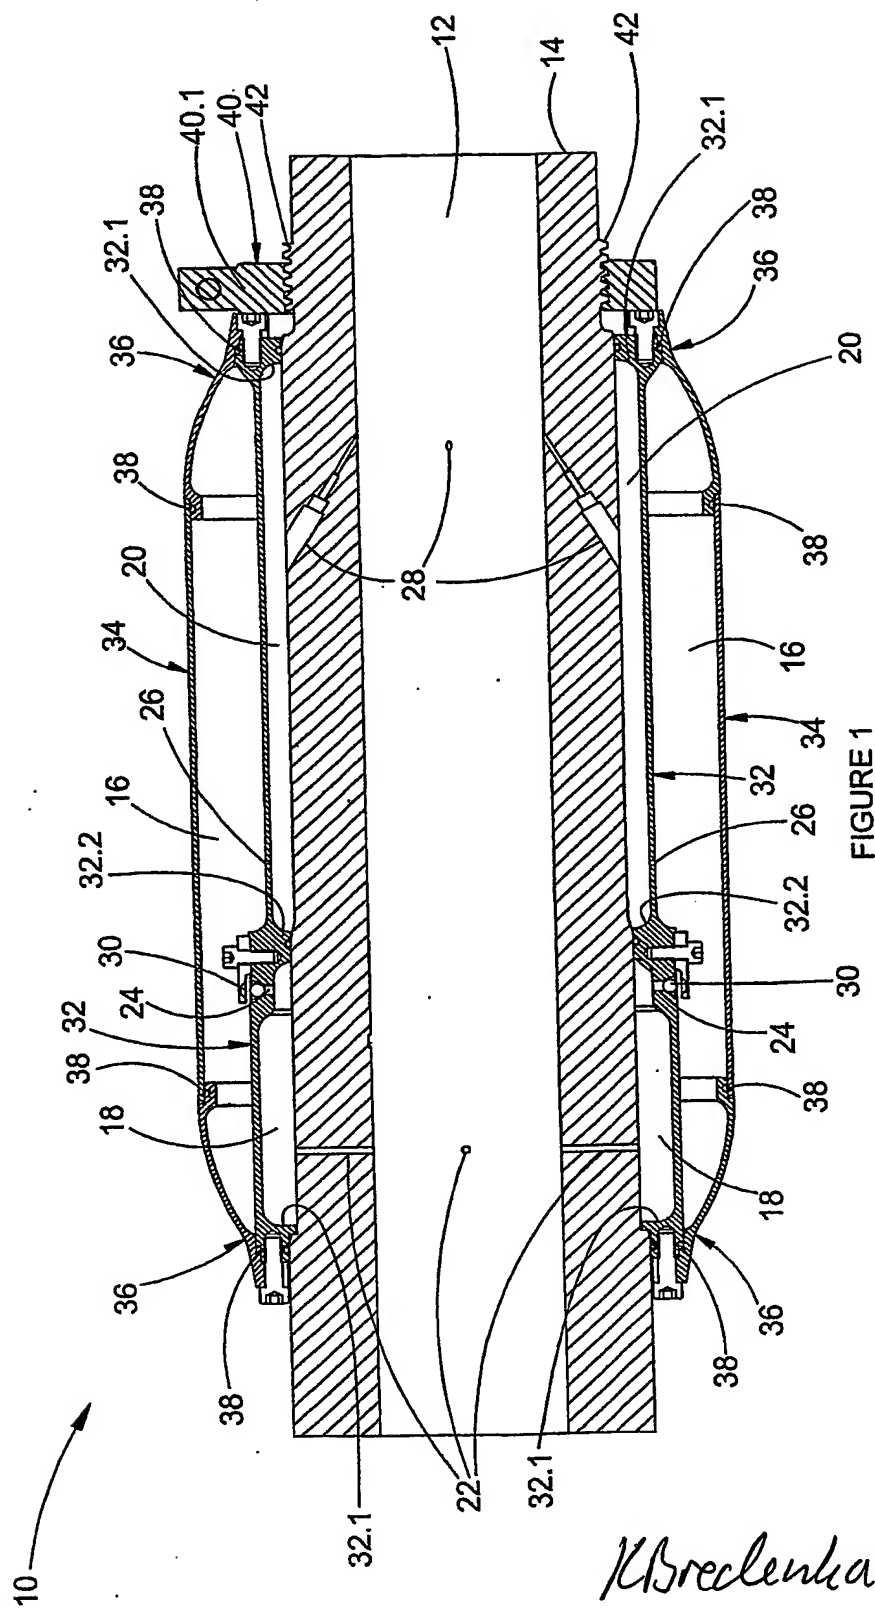


FIGURE 1



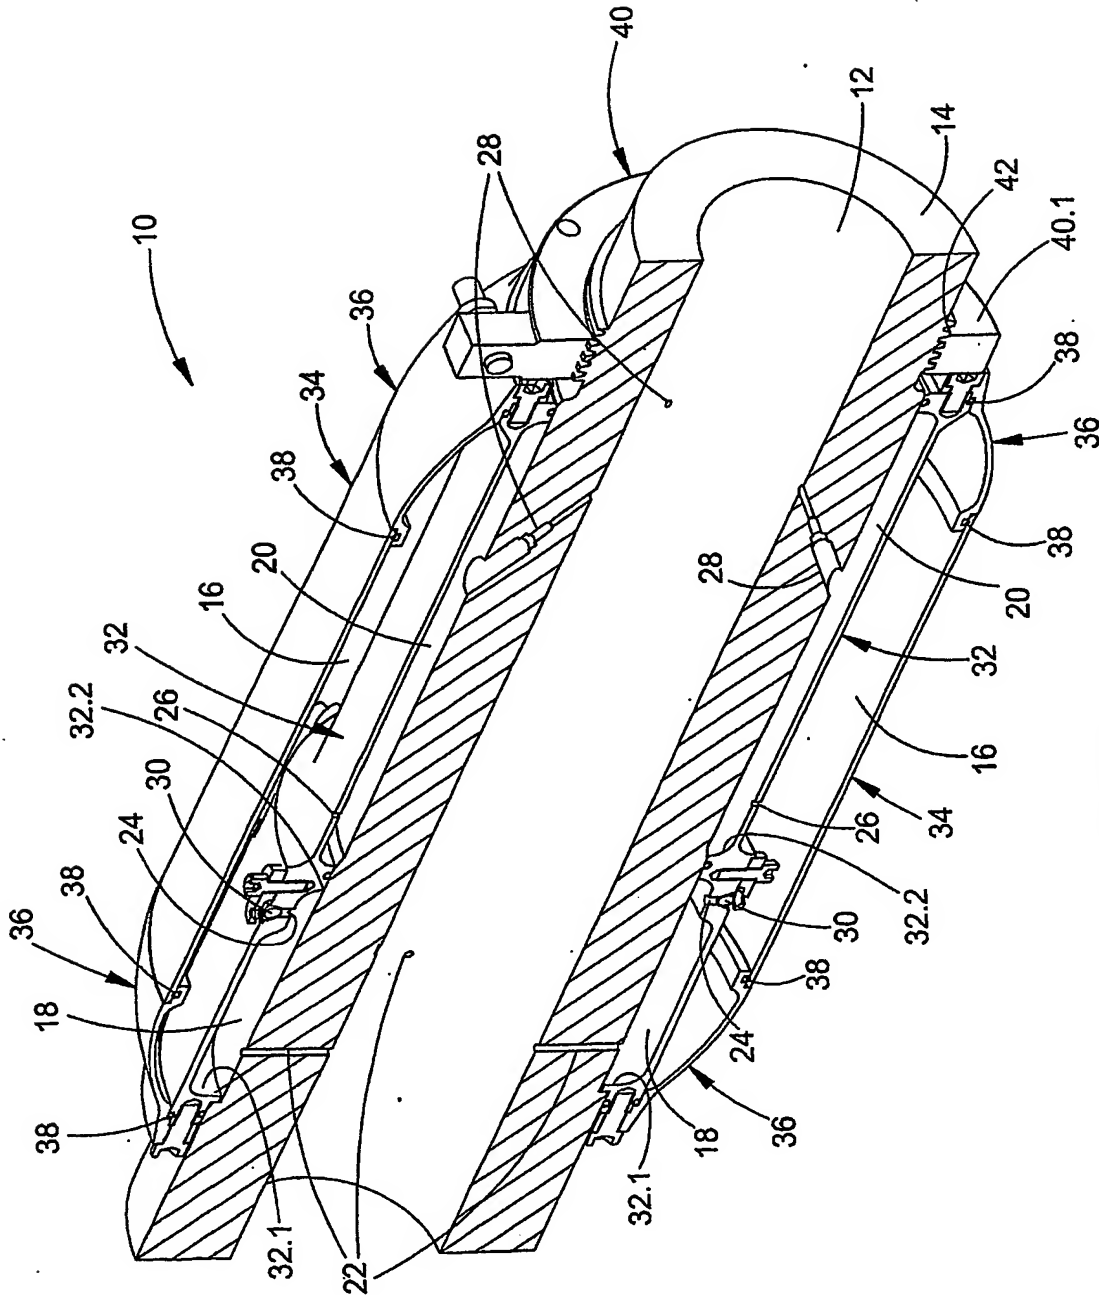


FIGURE 2

*K. Breckenkamp*

PATENT ATTORNEY FOR THE APPLICANT

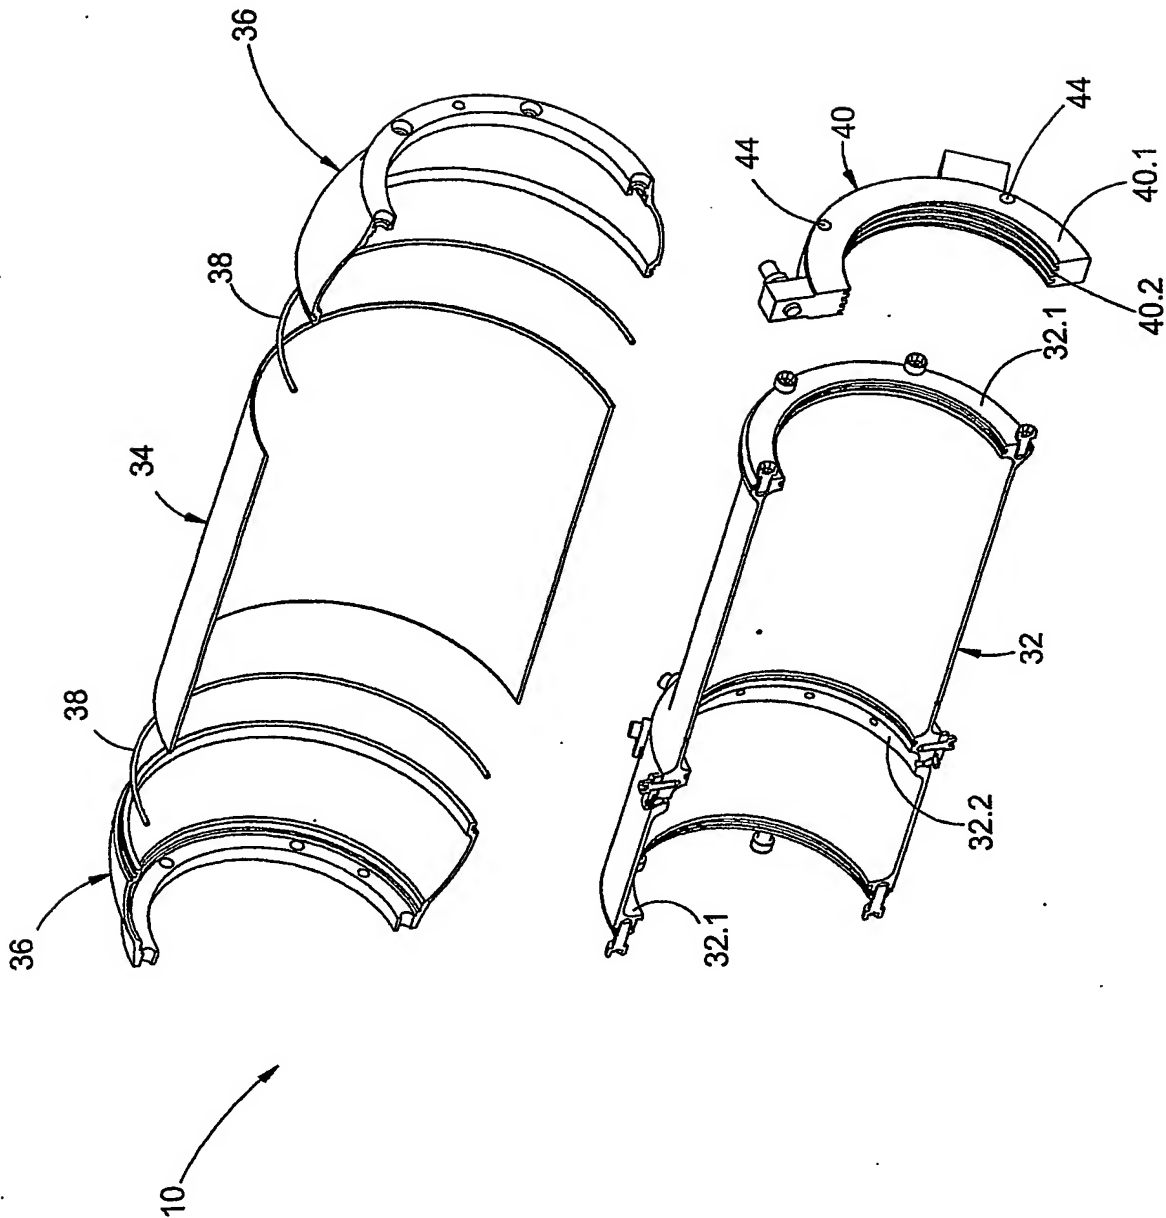
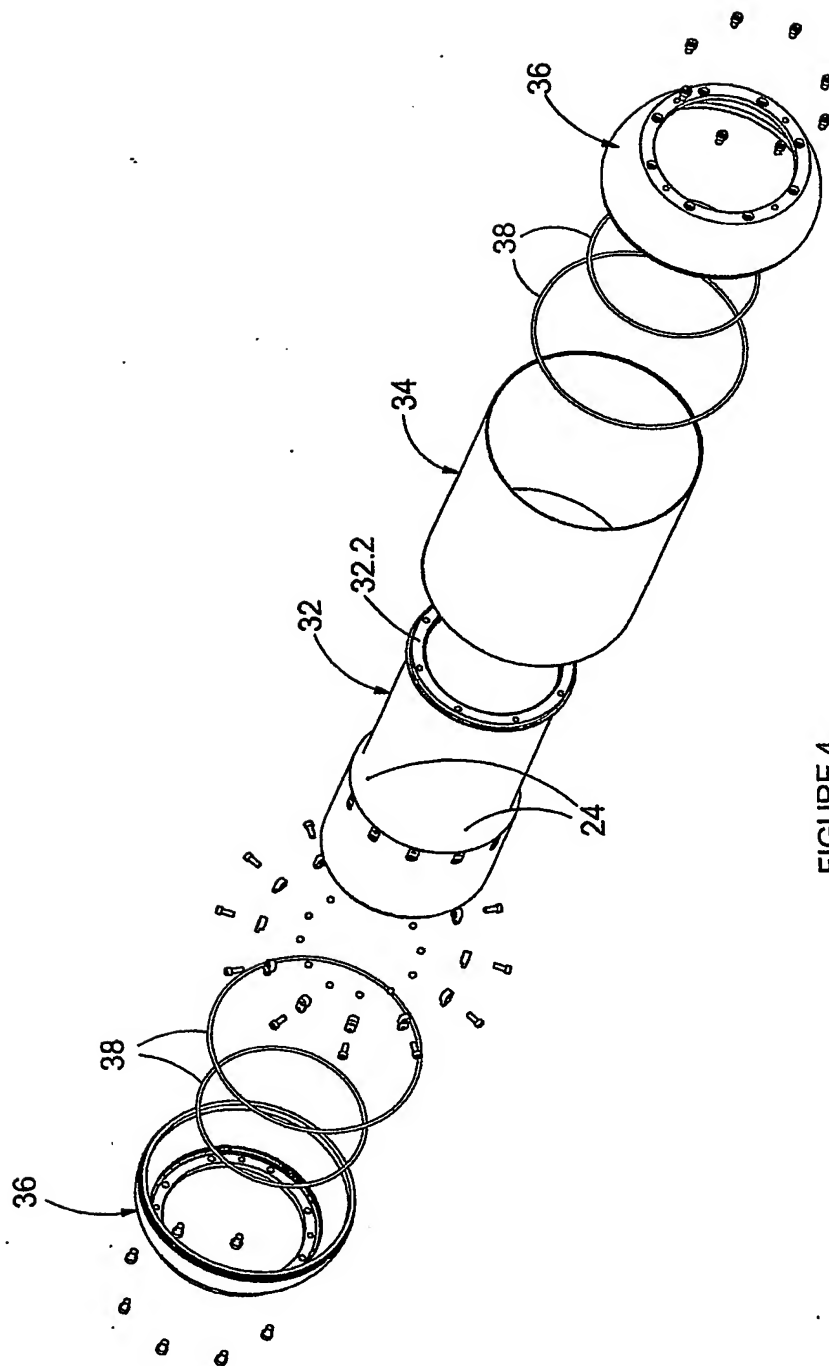


FIGURE 3




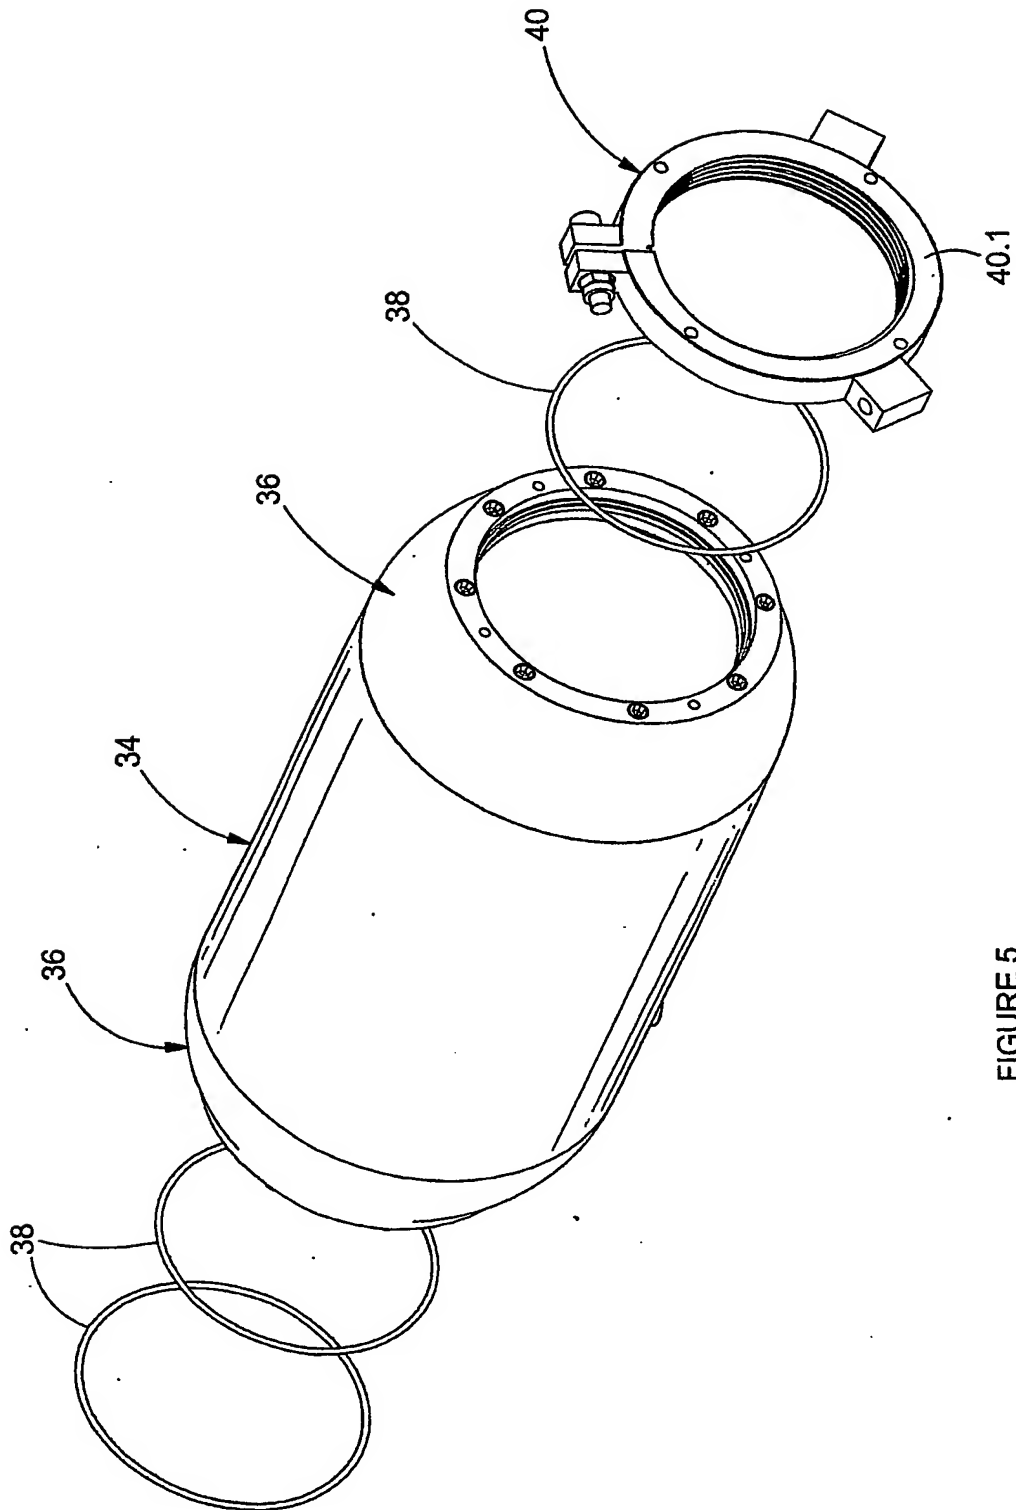


FIGURE 5

12003/5148

DENEL (PTY) LIMITED

6 SHEETS  
SHEET 6

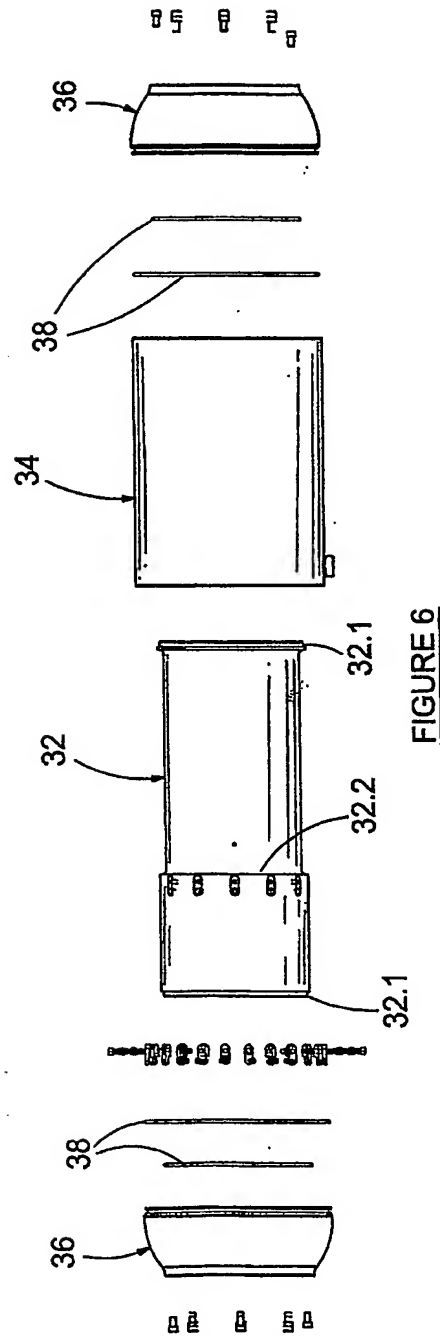

D.M. KISCH INC.

*K Bredenkamp*  
PATENT ATTORNEY FOR THE APPLICANT

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**